



# KFS-4

## 16 Watt



### ECE R65

## 6 x 2,7 Watt

## LED GEN-IV


XB2 03017

### CLASS-2

### diagnose outlet




### Sizes

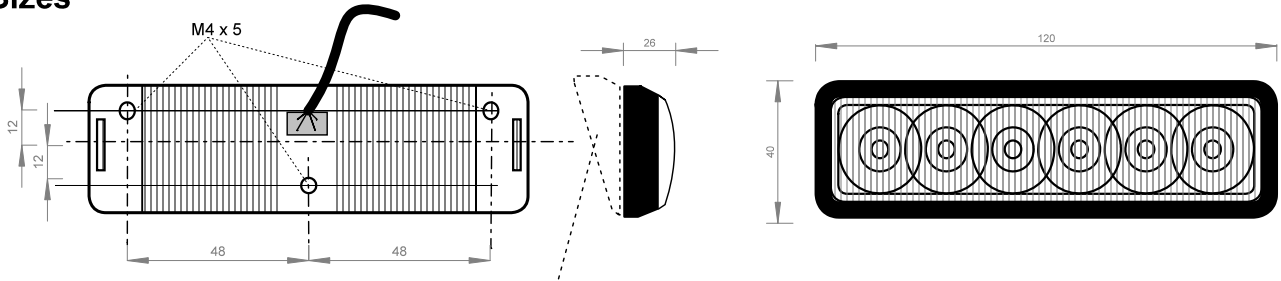

OPTION: ANGLED MOUNTINGPLATE

### Wiring

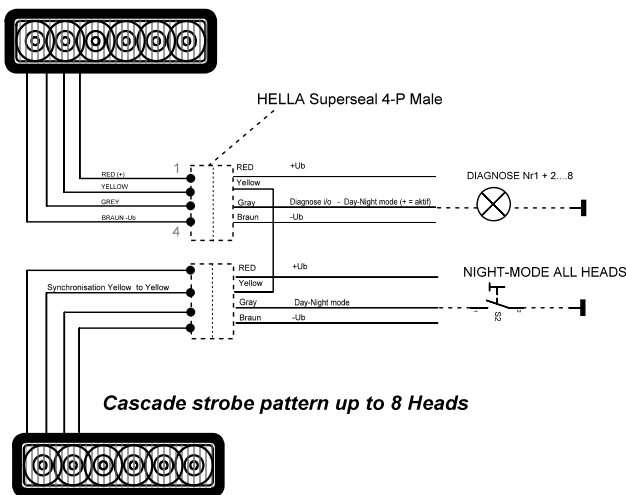

### Technical Data

Light Power	>200cd (Bleu)
Flashpattern - CLASS-2	Fast-Double (default), Triple, Double, Single
Flashpattern	Flash 1,33Hz, 4-burst-4, Flash-13Hz, Double pause, Flash 0,66Hz
Total Watts	16
Voltage	10,4...28,8V (max 36V)
Start Up Draw (Amps)	1,4 (12V) 0,7 (24V)
Running Draw (Amps)	same
Housing	POM / Polycarbonate
Lens	Polycarbonate clear
Protection	LED Module IP-67
Connector	Superseal 4-P Male
Operating temperature	-30...+70 Deg.Celsius
<b>Special</b>	<b>Cascade strobe pattern up to 8 Heads</b>

### Partnumber

K-FS4 16 Watt LED Blue Class-2 strobelight 5014-8451-000



Click-Inn Mercedes Sprinter Sprinter rmount kit

TECHNICAL DETAILS FOR INFORMATION ONLY. 27032010

### Mounting kits

### Partnumber

Universal		PB5014-8451-156
VW T5 Transporter	Grille - Click-Inn	PB5014-8451-150
MB Sprinter	Grille - Click-Inn	PB5014-8451-152
MB Vito	Grille - Click-Inn	PB5014-8451-154
ANGLED MOUNTINGPLATE	MB Sprinter	



TEL 0031.346 556.323 info@lichtbalk.nl www.warntec.com

### Directional Warninglight

### DWL 1-00