



KFS-XB2

22 (11) Watt



ECE R65

8 x 3 Watt

LED GEN-IV


XA1 003019
XB2 003020

CLASS-2
(CLASS-1)

Ultra High Intensity




Wiring



- RED (+) → +10...30V
- BLACK → 0V
- YELLOW → SYNCHRONISATION
- BLUE → PATTERN PROGRAMMING PULS TO 0V
- WHITE → DIM/NIGHT MODE (BLUE ONLY)

Sizes

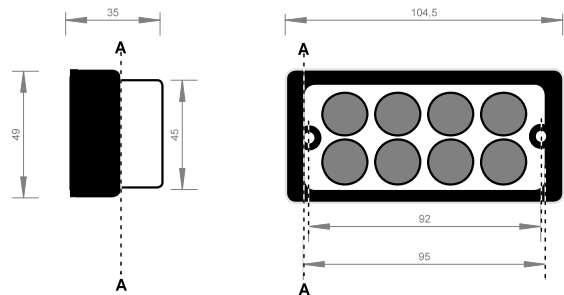

Applications



Technical Data

Light Power	>300cd (Bleu) >300 cd (Amber)
Flashpattern - Amber & Blue CLASS-1	Single, Double
Flashpattern - CLASS-2 (BLUE)	Single
Total Watts	21 (Blue) 11 (Amber)
Voltage	10...30V
Start Up Draw (Amps)	1,9 (12V) Bleu 1,1 (Amber)
Running Draw (Amps)	same
Housing	POM / Polycarbonate
Lens	Polycarbonate clear
Protection	LED Module IP-67
Connector	Wiring
Operating temperature	-30...+70 Deg.Celsius
Size	see drawing

Options



L-BRACKET
Partnr.: SP-8L



FLUSHMOUNT-BRACKET
Partnr.: SP-8FL



DECK HOUSING
Partnr.: WLS8-HS1



Bezel Customized CAD-Design
Partnr.: ON REQUEST



Angled Flushmount Bezels
Partnr.: BZ19

Partnumber



BLUE class-2

KFS-XB2



AMBER class-1

KFS-XA1

TECHNICAL DETAILS FOR INFORMATION ONLY. 27032010



TEL 0031-346.556.323 info@lichtbalk.nl www.warntec.com

Directional Warninglight

DWL 3-0