



KFS-BZ19

21 / 42 Watt LED
in blue



ECE R65



DUAL-LED
Blue / Amber combi-color

LED Perimeterlight




XB2 003020
XA1 003019

CLASS-2
CLASS-1





Ultr High Intensity

Sizes

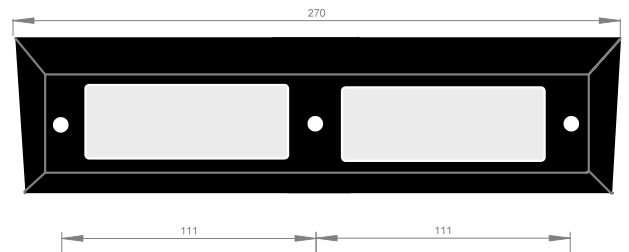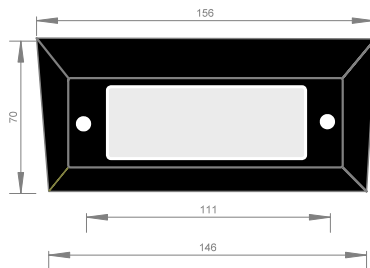

Wiring

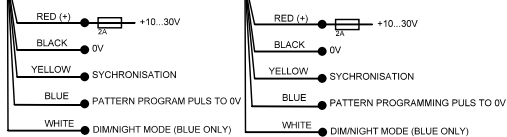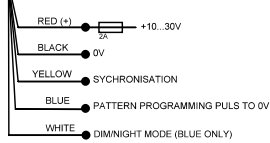

Technical Data

Light Power	>380cd (Bleu) >200 cd (Amber)
Flashpattern - Amber & Blue CLASS-1	Single, Double
Flashpattern - CLASS-2 (BLUE)	Single
Total Watts	21 (Blue) 10 (Amber)
Voltage	10...30V
Start Up Draw (Amps)	1,9 (12V) Bleu 1,1 (Amber)
Running Draw (Amps)	same
Housing	POM / Polycarbonate
Lens	Polycarbonate clear
Protection	LED Module IP-67
Connector	Wiring
Operating temperature	-30...+70 Deg.Celsius
Size	see drawing

Partnumber



KFS-BZ19-BA



KFS-BZ19-AB

Other colors or housing on request

Partnumber



KFS-BZ19-B



KFS-BZ19-A

TECHNICAL DETAILS FOR INFORMATION ONLY. 27032010



TEL 0031.346 556.323 info@lichtbalk.nl www.warntec.com

Directional Warninglight

DWL 3-1