



WLS-8 series

Directional lightbar

LED GEN-IV



ECE R65


XA1 003019
XB2 003020

CLASS-2
(CLASS-1)

Ultra High Intensity - Custom Design



option: rear view cctv camera

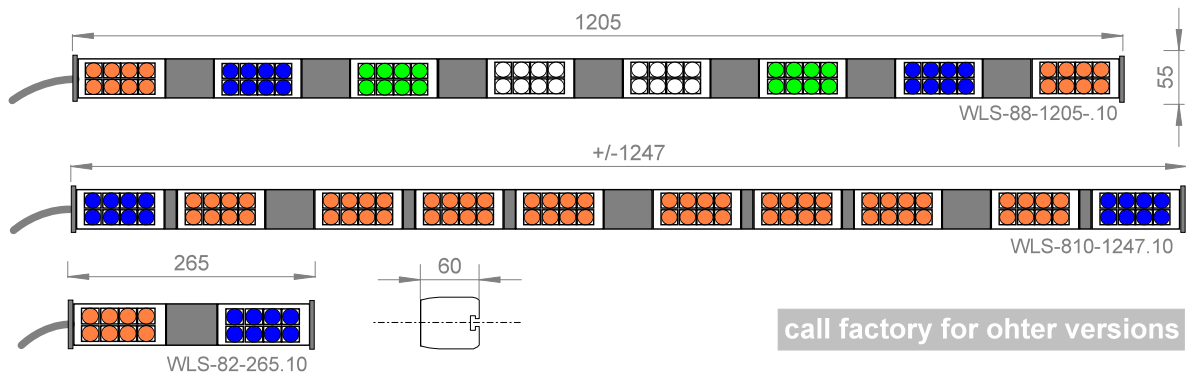

call factory for ohter versions

Options

Rear View CCTV Camera



Safety Director- controller



Directions	RIGHT, LEFT, SPLIT, FLASH
Channels	8 pcs
Function SW1	DIM/NIGHT MODE
Voltage	10....30V
Output	8 Switch to minus 2A
Connector	Quick Terminals

Technical Data

Light Power	>300cd (Bleu) >300 cd (Amber)
Flashpattern - Amber & Blue CLASS-1	Single, Double
Flashpattern - CLASS-2 (BLUE)	Single
Total Watts	21 (Blue) 11 (Amber) / Module
Voltage	10....30V
Start Up Draw (Amps)	1,9 (12V) Bleu 1,1 (Amber)
Running Draw (Amps)	same
Housing	POM / Polycarbonate
Lens	Polycarbonate clear
Protection	LED Module IP-67
Connector	Wiring
Operating temperature	-30...+70 Deg.Celsius
Size	see drawing

Partnumber

See drawing, call factory for partn.

ARROW-master controller

AC-DC

TECHNICAL DETAILS FOR INFORMATION ONLY. 27032010



TEL 0031-346.556.323 info@lichtbalk.nl www.warntec.com

Directional Lightbar

DWL 5-0